

H. L. Worden Co. "Make a Lamp"

System

Lamp Specifications

No. Glass Pieces: 420
Glass Needed: 7 sq. ft.
Diameter: 18"
Height: 10.5"
Aperture: 4"
Design Repeats: 6

Needed to make this lamp

Pattern Packet No. CF18-28*
FullForm™ No. CF18**
Stained Glass
4" Vase Cap***
Lamp Base or Hanging Hardware
to Swag

Additional Items Needed

Basic Supplies
Basic Tools


*No. CF18-28 Pattern Packet

Includes:

1 Paper Pattern (black) Sheet
5 MagicStrip™ (blue) Sheets
1 Instructions
1 Color Key w/ Glass Descriptions
1 Golfer Flat Cartoon w/ copper
wire for golf club


**No. CF18 FullForm™

360° form embossed and
numbered to accept glass

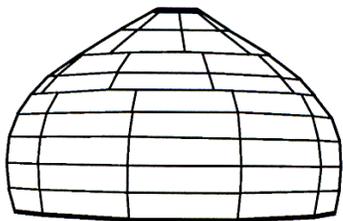

One Reusable FullForm™ is used
to make this 6-repeat design

***4" Vase Cap

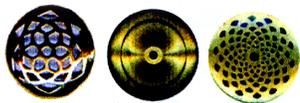

HC4 VC4 VHC4
Need One 4" (10.2cm) Vase Cap
Sold Separately

CF18-28 Long Tee Golf Lamp W

Cartoon Pattern Packet

6/11



Lamp

Color	Key	Description	Glass Type	Sq. Ft.
	BG	Design Background	Amber/Green Opal	2.9
	TE	Tee Background	Lt. Green Opal	1.3
	BB	Bottom Border	Amber/Green Textured	.6
	PT,ST,LH,	Pants/Sand Trap/	White Opal	.5
	BT,SS,CA	L. Hand/ Belt/Shoe/Cap		
	SH	Shirt	Blue Opal	.2
	SK	Sky	Lt. Sky Blue Opal	.6
	GR	Fairway Grass	Green Opal	.3
	TR	Trees	Dk. Green Opal	.25
	AR	Arm/Right Hand	Flesh	.125
	B,HA	Shoe Sole/Hair	Dk. Brown Opal	.125

Paper Pattern
MagicStrips™
MADE IN USA


Copper wire for Golf Club
MADE IN USA

FULL FORM CONSTRUCTION TIPS

Follow the Basic Method detailed in the WordenSystem™ Instruction Manual.

- (1) Select, cut, trim, and pin all stained glass pieces over the MagicStrip™ cartoon on the form. COMPLETELY COVER THE FORM. Use glass headed pins or common pins. Be sure to push the pins all the way in to hold each glass piece securely.
- (2) To ensure the vase cap will be level: If using a positioner; place vase cap at the top of the form; secure with a lock nut; cut and fit glass to the vase cap; tack solder before removing shade from the form.
- If not using positioner: place a 4" threaded rod through the hole in the form; place vase cap at top of the form; put a second vase cap or a check ring or washer inside the form; secure with lock nuts at both ends of the rod; cut and fit glass to the vase cap as above. If necessary, trim the top of the form to fit the vase cap in place.
- (3) To foil, pull the pins part way out, just far enough to remove each glass piece one at a time; foil & repin.
- (4) Tack solder all glass pieces together. Wipe and burnish with a wet cloth to stop oxidation.
- (5) Remove all of the pins. Leave the lamp on the form and make a flat seam by tinning all exposed copper foil. Wipe and burnish with a wet cloth.


Construction tip for 360° Form which curve in at the bottom: When making a lamp on a 360° FullForm™, such as the CF18 which curves in at the bottom, you must remove the shade in two parts either vertical or horizontal. You decide which is most appropriate for your particular lamp shade and skill level. **Please see instructions for details.**

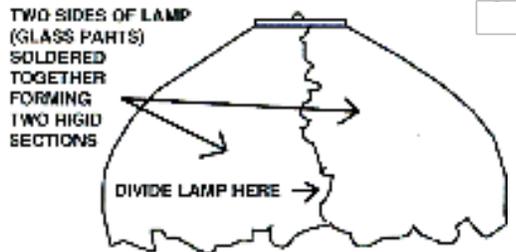

- (6) DO NOT BUILD ROUNDED SEAMS ON THE FORM. Remove the lamp and fill and then build the inside seams then do the outside.


By filling the inside first, any flow through will be removed when building the outside seams.

Make copies of this picture to try different color combinations for your lamp. Use the paper pattern for glass piece description.

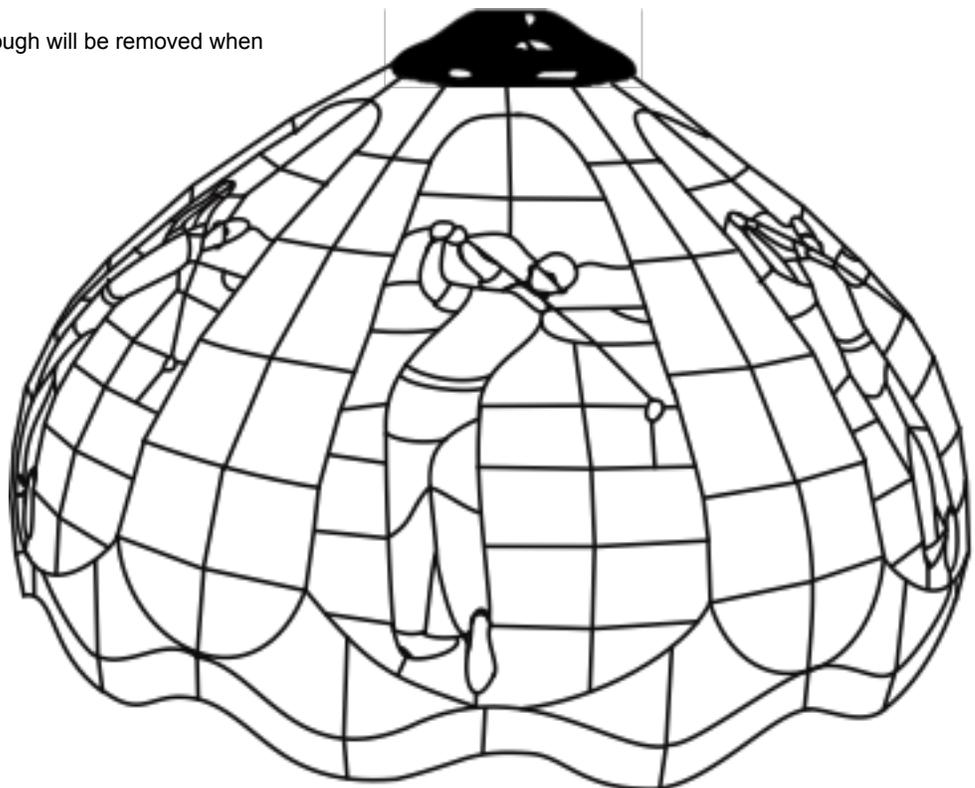

GLASS COLOR TIPS

Professional golfers have a world-wide tradition of being very well groomed. They dress with lots of white - pants, hats, wide belts and shoes. They dress in colorful shirts and attire that match.

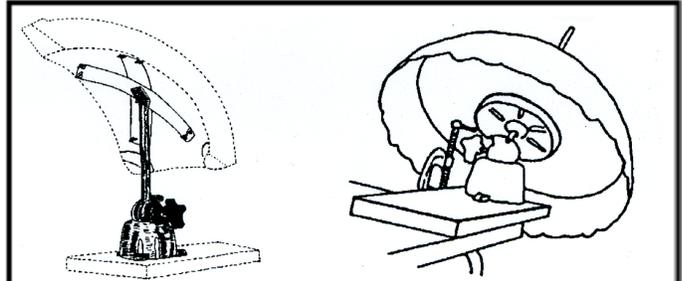

WordenSystem™ POSITIONER

Our No. 310 Positioner can be used to position sectional forms as the glass is cut and pinned to the form. It makes designing, building, and soldering your lamp panels much easier.

Use our No. 330 Positioner for working with full forms. The No. 330 is also great for working with partially finished shades whether built on sectional or full forms. Once the vase cap is installed put your lamp on the No. 330 and position the shade to have a level surface for final soldering.

GlassHouseStore.com
Decatur IL

